



FLEXLED MONOCHROME

FLEXIBLE LED-BÄNDER


FLEXIBLE LED-STRIPS



aspoeck.com



PRODUCT INFO

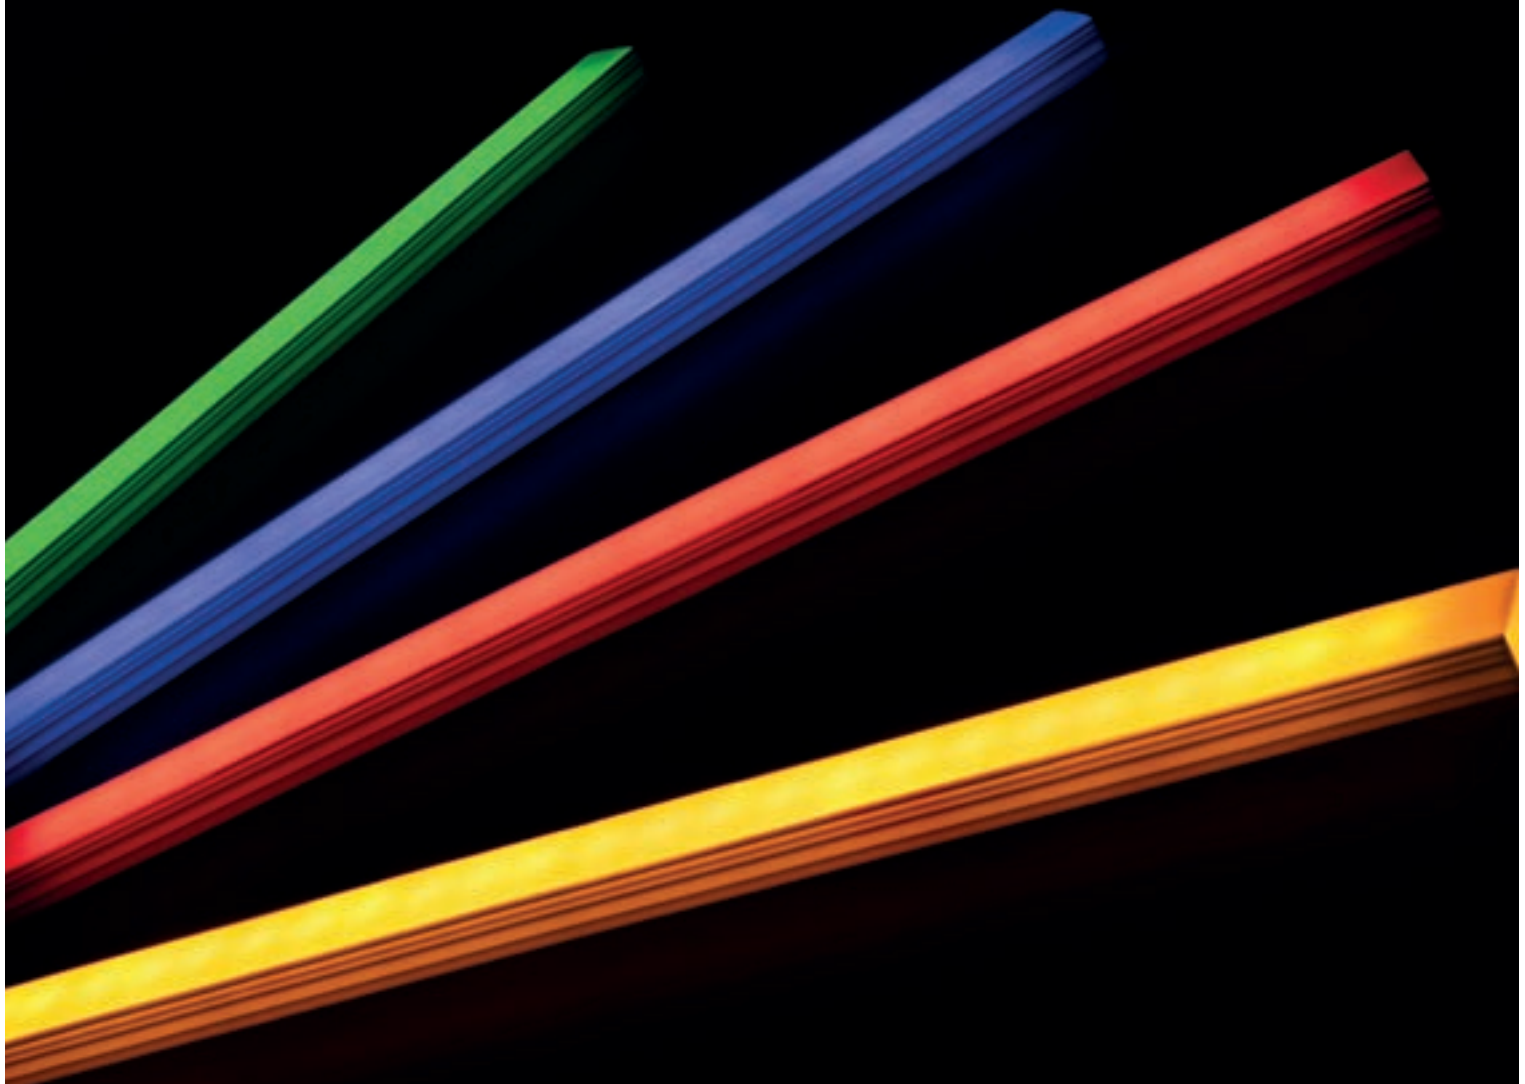




FLEXLED - MONOCHROME


FLEXIBLE LED-BÄNDER

FLEXIBLE LED-STRIPS

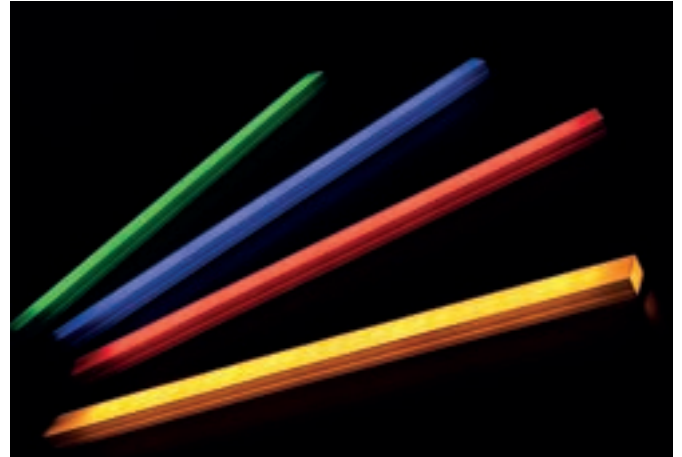


FlexLEDsmall

TRANSPARENTER VERGUSS
TRANSPARENT ENCAPSULATION




FlexLEDmedium

TRANSPARENTER VERGUSS
TRANSPARENT ENCAPSULATION




DIFFUSER VERGUSS
DIFFUSE ENCAPSULATION



FlexLEDlarge

DIFFUSER VERGUSS
DIFFUSE ENCAPSULATION



FEATURES

ADR Zone 2 IP 6K9K

IDEAL FÜR DIE ANWENDUNG ALS STATUSANZEIGEN ODER SONDERBELEUCHTUNGEN
IDEAL AS STATUS DISPLAY AND SPECIAL LIGHTING FOR VEHICLES

PERFEKTE SICHTBARKEIT FÜR DEN FAHRZEUGINNEN- ALS AUCH AUSSENBEREICH
PERFECT VISIBILITY FOR THE VEHICLE INTERIOR AS WELL AS THE EXTERIOR

IN DEN GRÖSSEN SMALL, MEDIUM UND LARGE ERHÄLTlich
AVAILABLE IN SMALL, MEDIUM AND LARGE

DIFFUSER ODER TRANSPARENTER VERGUSS
DIFFUSE OR TRANSPARENT ENCAPSULATION

LICHTFARBEN: GRÜN, BLAU, ROT, GELB
LIGHT COLOURS: GREEN, BLUE, RED, YELLOW





TECHNISCHE DATEN TECHNICAL FACTS	12V SMALL	12V MEDIUM	12V LARGE	24V SMALL	24V MEDIUM	24V LARGE
PROFILFARBE: PROFILE COLOUR:	Weiß White					
PROFILMATERIAL: PROFILE MATERIAL:	TPU					
VERGUSSMASSE: ENCAPSULATION MATERIAL:	Polyurethan Polyurethane					
ARBEITSTEMPERATURBEREICH: WORKING TEMPERATURE RANGE:	-40°C ~ +50°C					
GEWICHT (OHNE KABEL): WEIGHT (WITHOUT CABLE):	75 g/m	140 g/m	250 g/m	75 g/m	140 g/m	250 g/m
LEBENSDAUER*: DURABILITY*:	L ₈₀ = 60.000 Stunden L ₈₀ = 60.000 hours					
ABSTRAHLWINKEL: BEAM ANGLE:	120°					
NENNSPANNUNG: NOMINAL VOLTAGE:	12 V			24 V		
SPANNUNGSBEREICH: VOLTAGE RANGE:	9 V - 16 V			20 V - 36 V		
VERPOLSCHUTZ: REVERSE POLARITY PROTECTION:	JA YES					
BIDIREKTIONAL: BIDIRECTIONAL:	NEIN NO					
CHEMISCHE BESTÄNDIGKEIT: CHEMICAL RESISTANCE:	Diesel, Benzin, Auto-/Lkw-Waschchemikalien, Isopropylalkohol-Reiniger, Motoröl, Glasreiniger, Innenraum-Reiniger, Geschirrspülmittel, Desinfektionsmittel, Bleichmittel, Scheuermittel, Toilettenreiniger, Essigreiniger Diesel, gasoline, car/truck wash chemicals, isopropyl alcohol cleaner, motor oil, glass cleaner, interior cleaner, dishwashing detergent, disinfectant, bleach, scouring agent, toilet cleaner, vinegar cleaner					
EMV-ZULASSUNG: EMC APPROVAL:	auf Anfrage on request					
SCHUTZART DES LED-BANDES: PROTECTION CLASSIFICATION OF THE LED-STRIPS:	IP 6K9K					

* Nach den oben angegebenen Stunden weist die LED immer noch 80% der Gesamt-Lumenanzahl auf wie zur Zeit der ersten Inbetriebnahme.
After the hours specified above, the LED still has 80% of the lumens as at the time of the first use.

BIEGERADIUS BENDING RADIUS

FLEXLED SMALL FLEXLED MEDIUM FLEXLED LARGE
R_{MIN} = 100 MM R_{MIN} = 150 MM R_{MIN} = 200 MM

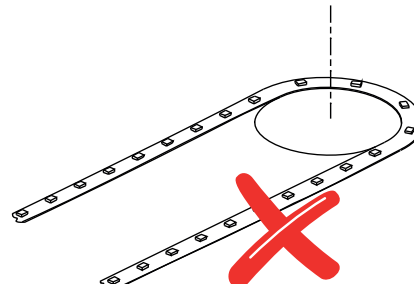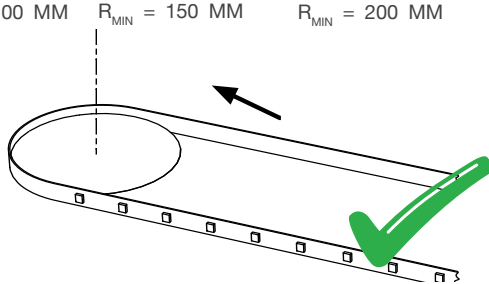

product information_FlexLED_monochrome_V2 | 2024-07
Misprints, technical changes and illustrations are subject to change.
© Aspöck Systems GmbH

Non-compliance with the information given (e.g. temperature) results in the exclusion of warranty/liability. For details, see the mounting instructions/TSD www.aspoeck.com.